

CS - CS/T - CS/TW - CS/I - CS/IW

Silicon elastomer insulated cables





Characteristics

- Connections insulated with a silicon moulding.
- Power cable: standard length: 1 m.
- **CS** : silicon elastomer insulated cables.
- **CS/T** : with tinned copper braid and earthing conductor.
- **CS/TW** : with tinned copper braid for mechanical protection, no earthing conductor.
- **CS/I** : with stainless steel braid and earthing conductor.
- **CS/IW** : with stainless steel braid for mechanical protection, no earthing conductor.

Applications

CS, CS/T, CS/TW, CS/I and CS/IW heating cables are mainly used in the household electrical and refrigeration industries and for equipment where protection against freezing or temperature maintenance is necessary.

To ensure that these heating elements enjoy a long service life, we recommend using a control device.

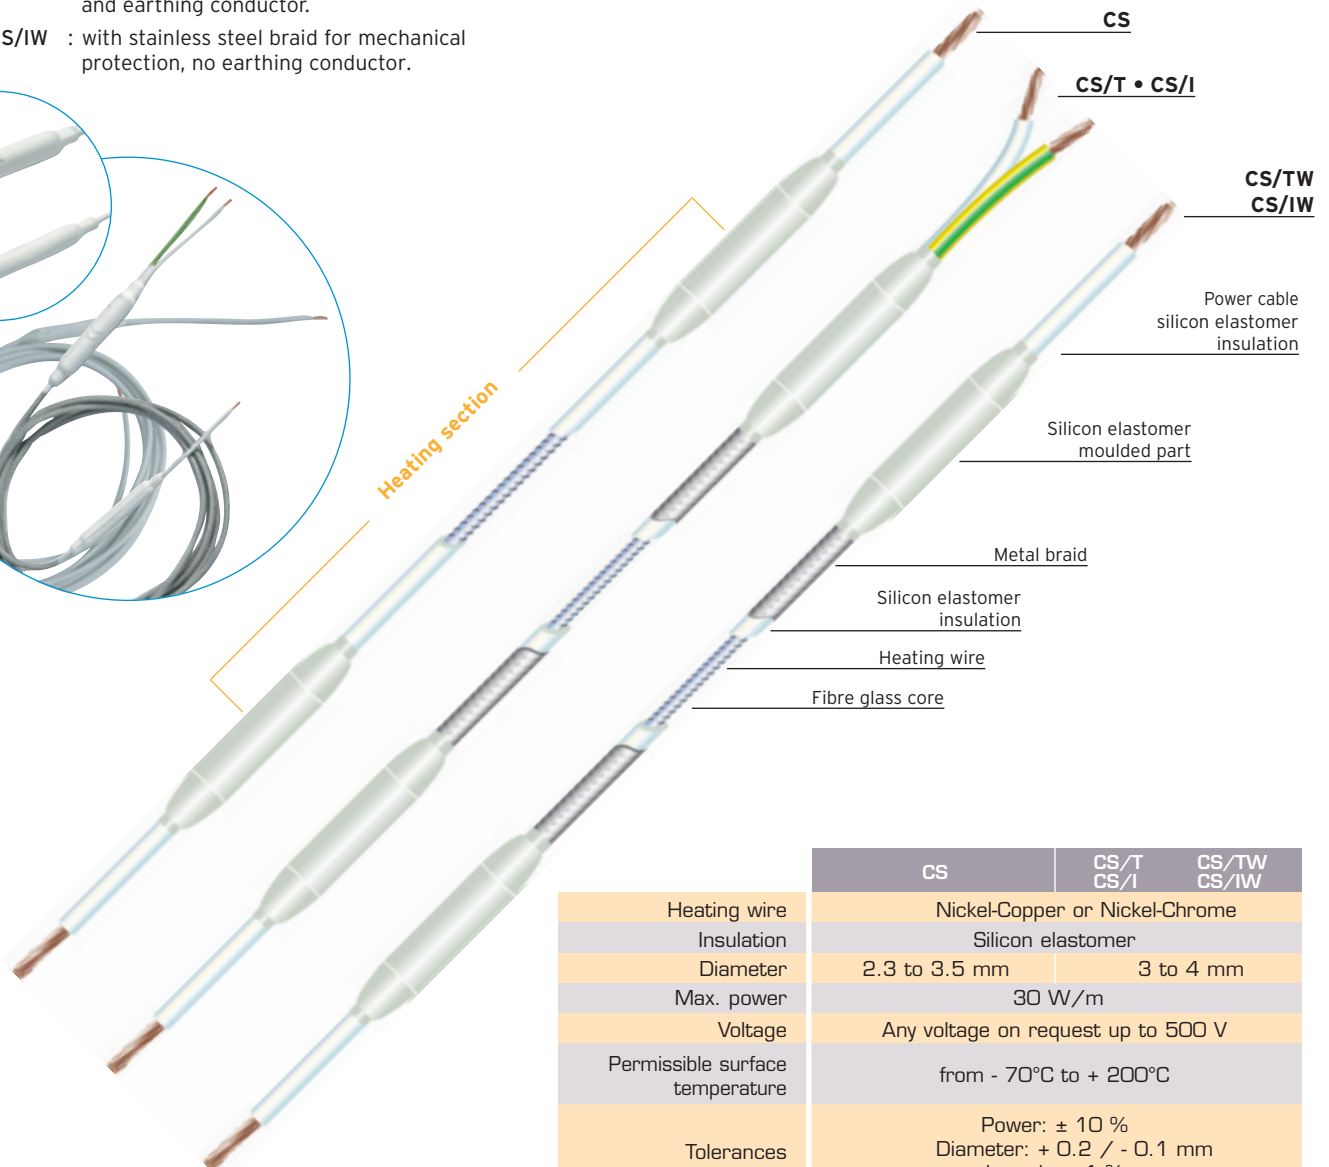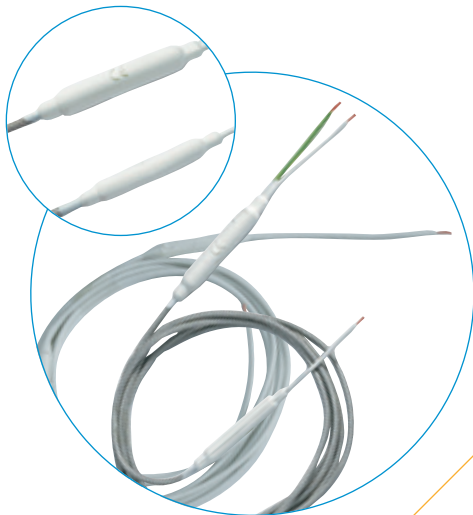

	CS	CS/T CS/I	CS/TW CS/IW
Heating wire	Nickel-Copper or Nickel-Chrome		
Insulation	Silicon elastomer		
Diameter	2.3 to 3.5 mm	3 to 4 mm	
Max. power	30 W/m		
Voltage	Any voltage on request up to 500 V		
Permissible surface temperature	from - 70°C to + 200°C		
Tolerances	Power: ± 10 % Diameter: + 0.2 / - 0.1 mm Length: ± 1 %		
Connection insulation	Sealed silicon moulding		

Use

Heating cables are series resistors. Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories.

FLEXELEC S.A.S

10, rue des frères Lumière
Z.A. du Bois Rond
69720 ST BONNET DE MURE - FRANCE
Tel: + 33 (0)4.72.48.30.90
Fax: + 33 (0)4.78.40.82.81
E-mail: flexelec@omerin.com

FLEXELEC Dept

OMERIN ASIA Pte Ltd
51 Goldhill Plaza #08-12/01
SINGAPORE 308900
Tel: + 65.6255.4778
Fax: + 65.6255.4779
E-mail: sales@omerin.com.sg

FLEXELEC (UK) Ltd

Unit 11 Kings Park Industrial Estate
Primrose Hill - KINGS LANGLEY
Hertfordshire - WD4 8ST - UK
Tel: + 44 (0) 1923.274477
Fax: + 44 (0) 1923.270264
E-mail: sales@omerin.co.uk

FLEXELEC Dept

OMERIN GmbH
Tennweg 2 B
D-65510 IDSTEIN - GERMANY
Tel: + 49 (0) 6126.94.31-0
Fax: + 49 (0) 6126.83.99
E-mail: omeringmbh@omerin.com