

### FTPO - FTPO/T

## PVC insulated constant power cables for refrigeration



### Characteristics




- Can be cut to length on site.
- Extremely simple termination.
- Cold tail incorporated, no extra connection necessary.
- Available as 10 and 15 W/m.
- Power supply: 230 V.
- **FTPO** : PVC insulated constant power cables.
- **FTPO/T** : with tinned copper braid for mechanical protection and earthing.

### Applications

FTPO cables are the most economical constant power cables. They are extremely flexible and are designed especially for the refrigeration industry.

FTPO 10 (10 W/m) is recommended for plastic piping.

To ensure that these heating elements enjoy a long service life, we recommend using a control device.

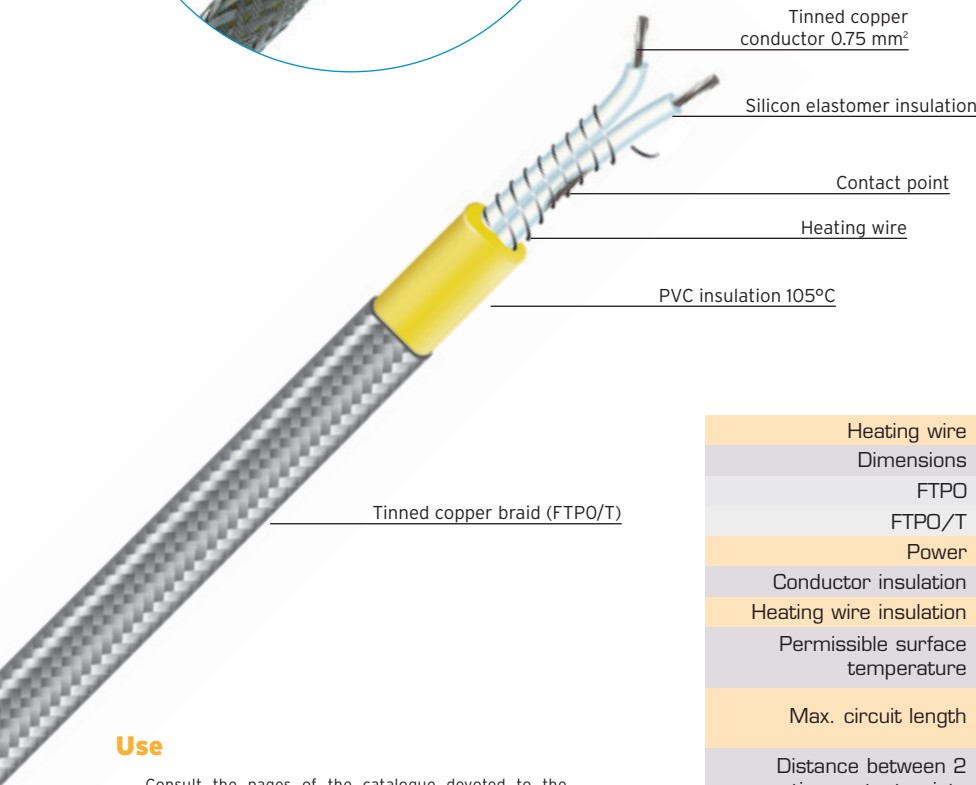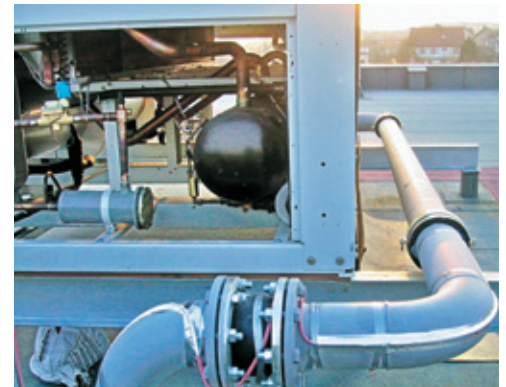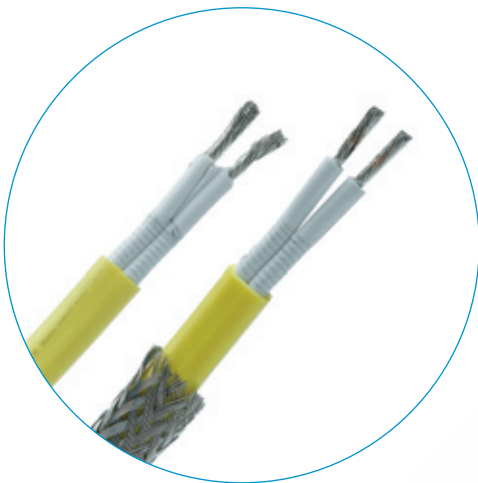

	FTPO
Heating wire	Nickel-Copper or Nickel-Chrome
Dimensions	
FTPO	5 x 7 mm
FTPO/T	5.5 x 7.5 mm
Power	10 W/m or 15 W/m
Conductor insulation	Silicon elastomer
Heating wire insulation	PVC 105°C
Permissible surface temperature	from - 30°C to + 90°C
Max. circuit length	10 W/m : 120 m 15 W/m : 80 m
Distance between 2 consecutive contact points	10 W/m : 1 m 15 W/m : 0.9 m

### Use

Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories.

#### FLEXELEC S.A.S

10, rue des frères Lumière  
Z.A. du Bois Rond  
69720 ST BONNET DE MURE - FRANCE  
Tel: + 33 (0)4.72.48.30.90  
Fax: + 33 (0)4.78.40.82.81  
E-mail: flexelec@omerin.com

#### FLEXELEC Dept

OMERIN ASIA Pte Ltd  
51 Goldhill Plaza #08-12/01  
SINGAPORE 308900  
Tel: + 65.6255.4778  
Fax: + 65.6255.4779  
E-mail: sales@omerin.com.sg

#### FLEXELEC (UK) Ltd

Unit 11 Kings Park Industrial Estate  
Primrose Hill - KINGS LANGLEY  
Hertfordshire - WD4 8ST - UK  
Tel: + 44 (0) 1923.274477  
Fax: + 44 (0) 1923.270264  
E-mail: sales@omerin.co.uk

#### FLEXELEC Dept

OMERIN GmbH  
Tenweg 2 B  
D-65510 IDSTEIN - GERMANY  
Tel: + 49 (0) 6126.94.31-0  
Fax: + 49 (0) 6126.83.99  
E-mail: omeringmbh@omerin.com