

## KYCYR Series cables for underfloor heating



### Characteristics

- Hard-wearing and flexible.
- Mechanical protection and earthing.
- 3 m power cable on one end only, integrated return conductor.
- Power supply: 230 V as standard.
- Series resistance, silicon elastomer and PVC insulation, with copper braided shielding and an extra PVC outer sheath.

### Applications

KYCYR heating cables are particularly hard-wearing and are used for applications set in concrete slabs to protect against freezing or to maintain a temperature.

The cables must be set in accordance with the local regulations in force: in France these include DTU 65-7 published by AFNOR.


To ensure that these heating elements enjoy a long service life, we recommend using a control device.



### Standard 230 V models

20 W/m		
Length (m)	Power (W)	Resistance ( $\Omega$ /m)
10	200	27.0
15	300	11.8
20	400	6.7
30	600	2.8
40	800	1.65
48	940	1.15
55	1100	0.87
75	1500	0.47
90	1800	0.30
113	2100	0.20

10 W/m		
Length (m)	Power (W)	Resistance ( $\Omega$ /m)
13	100	41.0
14	140	27.0
15.5	206	16.0
18	180	16.0
20	160	16.0
20	285	9.2
21	210	11.8
24	240	9.2
28	280	6.7
36	360	4.0
44	430	2.8
49	480	2.24
57	560	1.65
68	660	1.15
78	780	0.87
92	920	0.6
104	1040	0.47
128	1280	0.3
155	1550	0.2

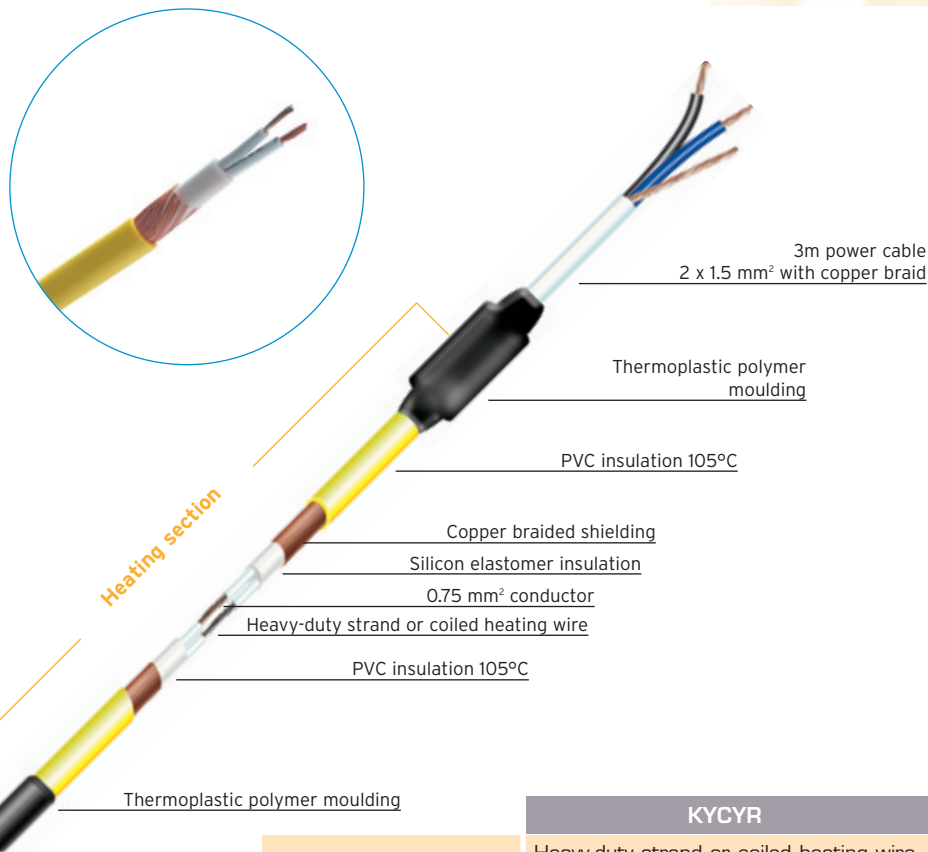

	KYCYR
Heating element	Heavy-duty strand or coiled heating wire (Nickel-Copper or Nickel-Chrome)
Diameter	7 to 8 mm
Max. power	20 W/m
Heating element insulation	Silicon elastomer
Outer insulation	PVC 105°C
Permissible surface temperature	up to + 80°C
Min. bend	6 x the diameter
Tolerances	Resistance - 5% + 10% Length $\pm$ 1 %

### Use

Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories.

#### FLEXELEC S.A.S

10, rue des frères Lumière  
Z.A. du Bois Rond  
69720 ST BONNET DE MURE - FRANCE  
Tel: + 33 (0)4.72.48.30.90  
Fax: + 33 (0)4.78.40.82.81  
E-mail: flexelec@omerin.com

#### FLEXELEC Dept

OMERIN ASIA Pte Ltd  
51 Goldhill Plaza #08-12/01  
SINGAPORE 308900  
Tel: + 65.6255.4778  
Fax: + 65.6255.4779  
E-mail: sales@omerin.com.sg

#### FLEXELEC (UK) Ltd

Unit 11 Kings Park Industrial Estate  
Primrose Hill - KINGS LANGLEY  
Hertfordshire - WD4 8ST - UK  
Tel: + 44 (0) 1923.274477  
Fax: + 44 (0) 1923.270264  
E-mail: sales@omerin.co.uk

#### FLEXELEC Dept

OMERIN GmbH  
Tennweg 2 B  
D-65510 IDSTEIN - GERMANY  
Tel: + 49 (0) 6126.94.31-0  
Fax: + 49 (0) 6126.83.99  
E-mail: omeringmbh@omerin.com