


C1P - C1P/T - C1P/I PVC insulated cords





Characteristics

-  cords on request.
- C1P : PVC insulated cords.
- C1P/T : with tinned copper braid for mechanical protection and earthing.
- C1P/I : with stainless steel braid for mechanical protection and earthing.

Applications

C1P, C1P/T and C1P/I heating cables are mainly used in the household electrical or refrigeration industries, or in machines requiring protection against freezing or temperature maintenance. To ensure that these heating elements enjoy a long service life, we recommend using a control device.

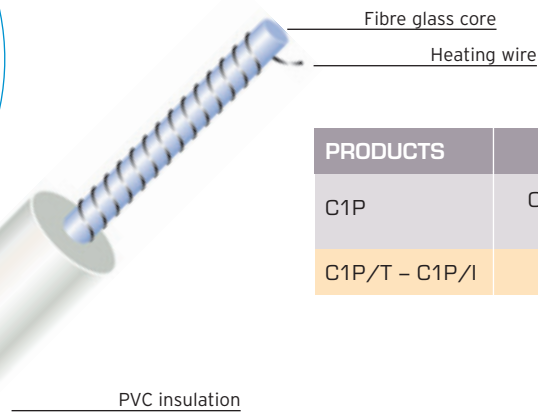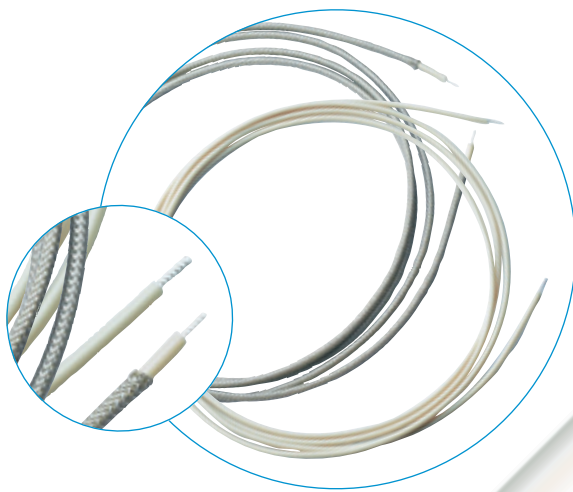

PRODUCTS	INSULATION CLASS
C1P	CLASS O (single insulated) CLASS III (if low voltage)
C1P/T - C1P/I	CLASS I (earthing)

	C1P	C1P/T - C1P/I
Support	Fibre glass Ø 0.7 or Ø 1.1 m	
Heating wire	Nickel-Copper or Nickel-Chrome	
Insulation	PVC 105°C	
Diameter	2.0 to 3.0 mm	2.3 to 3.3 mm
Max. ohmic value	5000 Ω/m	
Max. power	15 W/m	
Max. voltage	600 V	
Permissible surface temperature	from - 30°C to + 105°C	
Tolerances	Resistance: ± 10 % Diameter: + 0.2 / - 0.1 mm	

Metal braid
(C1P/T - C1P/I)

PVC insulation

Use

Heating cords are series resistors. Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories

FLEXELEC S.A.S

10, rue des frères Lumière
Z.A. du Bois Rond
69720 ST BONNET DE MURE - FRANCE
Tel: + 33 (0)4.72.48.30.90
Fax: + 33 (0)4.78.40.82.81
E-mail: flexelec@omerin.com

FLEXELEC Dept

OMERIN ASIA Pte Ltd
51 Goldhill Plaza #08-12/01
SINGAPORE 308900
Tel: + 65.6255.4778
Fax: + 65.6255.4779
E-mail: sales@omerin.com.sg

FLEXELEC (UK) Ltd

Unit 11 Kings Park Industrial Estate
Primrose Hill - KINGS LANGLEY
Hertfordshire - WD4 8ST - UK
Tel: + 44 (0) 1923.274477
Fax: + 44 (0) 1923.270264
E-mail: sales@omerin.co.uk

FLEXELEC Dept

OMERIN GmbH
Tennweg 2 B
D-65510 IDSTEIN - GERMANY
Tel: + 49 (0) 6126.94.31-0
Fax: + 49 (0) 6126.83.99
E-mail: omeringmbh@omerin.com

C1S - C1S/T - C1S/I Silicon elastomer cords




Characteristics

- cords on request.
- **C1S** : silicon elastomer cords.
- **C1S/T** : with tinned copper braid for mechanical protection and earthing.
- **C1S/I** : with stainless steel braid for mechanical protection and earthing.

Applications

C1S, C1S/T and C1S/I heating cords are mainly used in the household electrical or refrigeration industries, or in machines requiring protection against freezing or temperature maintenance.

To ensure that these heating elements enjoy a long service life, we recommend using a control device.

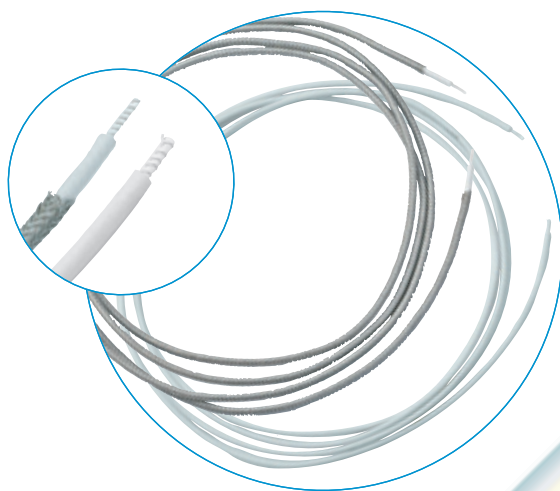

Fibre glass core

Heating wire

Silicon elastomer insulation

Metal braid
(C1S/T - C1S/I)

PRODUCTS	INSULATION CLASS
C1S	CLASS O (single insulated) CLASS III (if low voltage)
C1S/T - C1S/I	CLASS I (earthing)

	C1S	C1S/T - C1S/I
Support	Fibre glass Ø 0.7 or Ø 1.1 mm	
Heating wire	Nickel-Copper or Nickel-Chrome	
Insulation	Silicon elastomer	
Diameter	2.4 to 3.5 mm	2.7 to 3.8 mm
Max. ohmic value	5000 Ω/m	
Max. power	30 W/m	
Max. voltage	600 V	
Permissible surface temperature	from - 70°C to + 200°C	
Tolerances	Resistance: ± 10 % Diameter: + 0.2 / - 0.1 mm	

Use

Heating cords are series resistors. Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories.

FLEXELEC S.A.S

10, rue des frères Lumière
Z.A. du Bois Rond
69720 ST BONNET DE MURE - FRANCE
Tel: + 33 (0)4.72.48.30.90
Fax: + 33 (0)4.78.40.82.81
E-mail: flexelec@omerin.com

FLEXELEC Dept

OMERIN ASIA Pte Ltd
51 Goldhill Plaza #08-12/01
SINGAPORE 308900
Tel: + 65.6255.4778
Fax: + 65.6255.4779
E-mail: sales@omerin.com.sg

FLEXELEC (UK) Ltd

Unit 11 Kings Park Industrial Estate
Primrose Hill - KINGS LANGLEY
Hertfordshire - WD4 8ST - UK
Tel: + 44 (0) 1923.274477
Fax: + 44 (0) 1923.270264
E-mail: sales@omerin.co.uk

FLEXELEC Dept

OMERIN GmbH
Tennweg 2 B
D-65510 IDSTEIN - GERMANY
Tel: + 49 (0) 6126.94.31-0
Fax: + 49 (0) 6126.83.99
E-mail: omeringmbh@omerin.com

C1F - C1F/T - C1F/I Fluoropolymer insulated cords





Characteristics

- cords on request.
- **C1F** : fluoropolymer insulated cords.
- **C1F/T** : with tinned copper braid for mechanical protection and earthing.
- **C1F/I** : with stainless steel braid for mechanical protection and earthing.

Applications

C1F, C1F/T and C1F/I heating cords are mainly used in corrosive environments, or in machines requiring protection against freezing or temperature maintenance.

To ensure that these heating elements enjoy a long service life, we recommend using a control device.

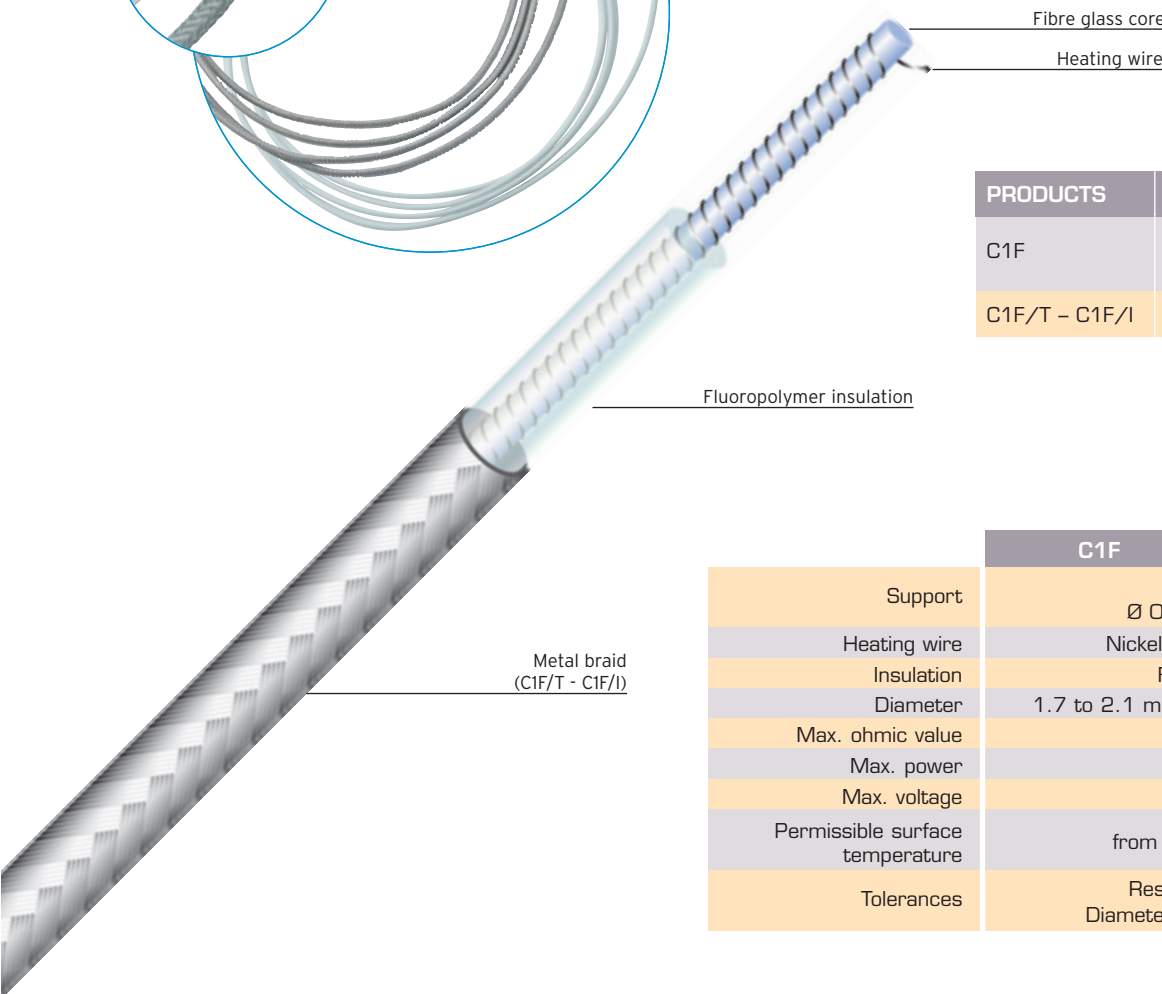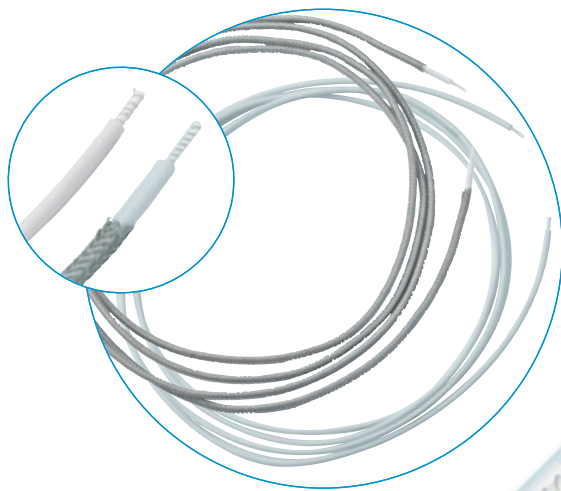

PRODUCTS	INSULATION CLASS
C1F	CLASS 0 (single insulation) CLASS III (if low voltage)
C1F/T - C1F/I	CLASS I (earthing)

	C1F	C1F/T - C1F/I
Support	Fibre glass Ø 0.7 or Ø 1.1 mm	
Heating wire	Nickel-Copper or Nickel-Chrome	
Insulation	Fluoropolymer	
Diameter	1.7 to 2.1 mm	2.0 to 2.4 mm
Max. ohmic value	5000 Ω/m	
Max. power	30 W/m	
Max. voltage	600 V	
Permissible surface temperature	from -70°C to + 200°C	
Tolerances	Resistance: ± 10 % Diameter: + 0.2 / - 0.1 mm	

Use

Heating cords are series resistors. Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories

FLEXELEC S.A.S

10, rue des frères Lumière
Z.A. du Bois Rond
69720 ST BONNET DE MURE - FRANCE
Tel: + 33 (0)472.48.30.90
Fax: + 33 (0)478.40.82.81
E-mail: flexelec@omerin.com

FLEXELEC Dept

OMERIN ASIA Pte Ltd
51 Goldhill Plaza #08-12/01
SINGAPORE 308900
Tel: + 65.6255.4778
Fax: + 65.6255.4779
E-mail: sales@omerin.com.sg

FLEXELEC (UK) Ltd

Unit 11 Kings Park Industrial Estate
Primrose Hill - KINGS LANGLEY
Hertfordshire - WD4 8ST - UK
Tel: + 44 (0) 1923.274477
Fax: + 44 (0) 1923.270264
E-mail: sales@omerin.co.uk

FLEXELEC Dept

OMERIN GmbH
Tennweg 2 B
D-65510 IDSTEIN - GERMANY
Tel: + 49 (0) 6126.94.31-0
Fax: + 49 (0) 6126.83.99
E-mail: omeringmbh@omerin.com